

POT/GB2005/050045.



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

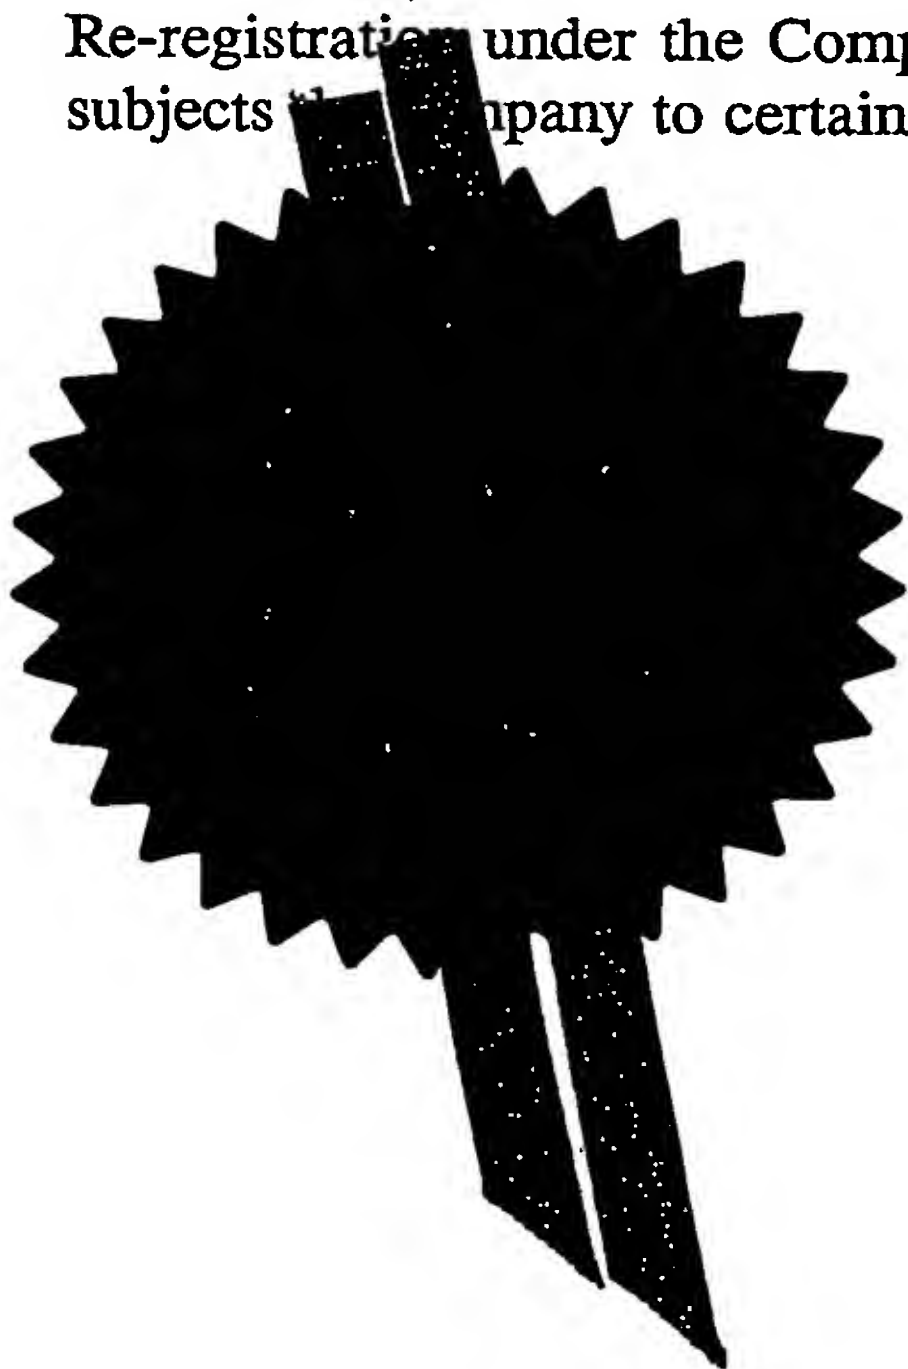

Signed *AmBennet*

Dated 18 April 2005

**BEST AVAILABLE COPY**

A  
- 8 APR 2004

The  
Patent  
Office

08APR04 EB87531-1 D02887  
F01/7700 0.00-0408005.7 ACCOUNT CHA

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference XA1898

2. Patent application number 0408005.7  
(The Patent Office will fill in this part)

8 APR 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

EADS Astrium Limited

Gunnels Wood Road  
Stevenage  
Hertfordshire SG1 2AS

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

~~000000000001~~

United Kingdom

8779274001

4. Title of the invention IMPROVEMENTS RELATING TO  
DEPLOYABLE BOOMS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BAE SYSTEMS plc  
Group IP Department  
Lancaster House, P.O. Box 87  
Farnborough Aerospace Centre  
Farnborough, Hampshire, GU14 6YU

Patents ADP number (if you know it)

07914674002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	-------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s) 4

Abstract 1

Drawing(s) 2 + 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Aniruddha Mukherjee

Date

7.4.2004

Aniruddha MUKHERJEE

12. Name and daytime telephone number of person to contact in the United Kingdom

Pat Tye 01252 384628

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## IMPROVEMENTS RELATING TO DEPLOYABLE BOOMS

### Field of the Invention

The present invention concerns improvements relating to deployable  
5 booms. More particularly, but not exclusively, the present invention concerns  
improvements relating to articulated booms for deployment of one or more  
antenna reflectors in space.

### Background of the Invention

Single offset reflector antennas with short focal lengths deployed  
10 conventionally in space missions are known to be of limited applicability to  
linearly-polarised shaped beam coverages because of their poor cross-polar  
properties. These are generally incompatible with the stringent specifications  
placed on such space missions, which typically dictate the use of polarisation-  
sensitive reflectors or dual offset reflector geometries (for example, Gregorian-  
15 type reflector geometries). Such geometries tend to suffer from significant  
disadvantage in terms of mass and the amount of accommodation space taken  
up for accommodating component parts.

It is to be understood that single offset reflectors generate high cross-  
polar levels because of their fundamental asymmetry. This can be reduced if  
20 the reflector focal length is increased relative to the aperture diameter. Recent  
studies of deployment of two reflector configurations have shown that long focal  
lengths are advantageous in improving overall scanning performance, so that  
boom-deployed long focal length systems can be suitably used in multi-beam  
applications. Such systems are being increasingly proposed for the emerging  
25 Ka band market. It has also been found that when the ratio focal length to  
diameter approaches 2, the cross-polar performance improves sufficiently that  
the antenna can be used for dual polarised shaped beams in Ku band, for  
example.

### Objects and Summary of the Invention

- 2 -

The present invention aims to overcome or at least substantially reduce some of the above mentioned problems associated with known designs.

It is a principal object of the present invention to provide a compact and simple support structure for effective deployment of one or more antenna reflectors from a single side of the spacecraft. It is to be understood that the inventive structure finds utility in the support deployment of multiple reflectors in various space missions, and bears definite structural advantage in terms of weight saving, simplicity of design (by taking up less accommodation space) and efficient accommodation of its apertures/reflectors.

It is another principal object of the present invention to provide a support structure which can deploy relatively large diameter antenna reflectors with long focal lengths (typically, with focal length to diameter ratios greater than two), giving acceptable isolation and cross polar performance. This advantageously obviates the need for complex subreflector (Gregorian) designs.

It is another principal object of the present invention to provide a support structure with a flexible configuration of parts which can be suitably adapted for use with a wide range of antenna reflector diameters and focal lengths.

In broad terms, the present invention resides in the concept of providing an antenna reflector carried by an extendable boom of a predetermined sufficient length so that the reflector can be controllably moved by extension of the boom from a stowed position to a required deployed position.

More particularly, according to a first aspect of the present invention there is provided an articulated boom comprising: a support arm defining a number of hingedly-connected joints, the arm being adapted and arranged to carry an antenna reflector so that in use, the reflector can move between a first stowed position in which the reflector is in folded condition and a second deployed position in which the reflector is in deployed condition.

Further, according to a second aspect of the present invention there is provided an articulated boom for connection to a spacecraft vehicle comprising: a support arm defining a number of hingedly-connected joints, the arm being adapted and arranged to carry an antenna reflector so that in use, the reflector



- 3 -

can move between a first stowed position in which the reflector is nested within a predetermined volume of the spacecraft vehicle and a second deployed position in which the reflector is deployed in space.

5 In this specification, it is to be understood that the term "dog-leg" in the proposed boom design is used to mean or cover any bend or curve in the boom which allows the boom structure to follow the circumference/periphery of the reflector (which it carries) and to pick up the mounting hard points.

10 In accordance with an exemplary embodiment of the invention which will be described hereinafter in detail, the support arm of the boom includes a bend ("dog-leg"). The "dog-leg" is shaped so as to permit the support arm of the boom design to be positioned at the circumference/periphery of the reflector when in stowed condition. Advantageously, this allows the boom structure when used in spacecraft to pick up on the spacecraft mounting hard points for launch constraint. Thus, in the context of antenna reflector deployment from the  
15 sidewall of a spacecraft, the "dog-leg" is effectively used to stow the boom with reflector close to the sidewall of the spacecraft, allowing the boom to be tied down for launch. In the context of multiple reflector deployment from the sidewall of a spacecraft, the "dog-leg" allows an optimal arrangement of booms and reflectors in the stowed configuration. In this stowed configuration, the  
20 booms are positioned at the circumference/periphery of the reflectors, therefore allowing the reflectors to be stowed very close together and hence aiding accommodation within the launch vehicle fairing.

Advantageously, articulation of the boom design is achieved via up to four single-axis hingedly-connected joints. These joints are conveniently either  
25 stepper motors with harmonic drive output or spring-operated mechanical hinges.

Optionally, antenna pointing is provided by use of a two-axes antenna pointing mechanism or by use of articulated stepper motor harmonic drive units. Conveniently, the two-axis antenna pointing mechanism (APM) functions are  
30 mounted separately on the support arm of the boom and on the antenna reflector. For example, in the context of antenna reflector deployment from a

sidewall of a spacecraft, one of the two-axis APM functions may be built into the boom close to the spacecraft, the other mounted onto the rear of the reflector. This has the advantage of reducing/minimising the mass load mounted onto the reflector, whilst providing the required two-axes geometry.

5            Advantageously, the support arm of the boom is configured to be sufficiently long so as to carry an antenna reflector of up to 3.5 metres diameter with an associated focal length of up to 7 metres (when deployed). For antenna reflector deployment from a spacecraft, this can achieve good RF performance from a single offset reflector, alleviating the need for a Gregorian  
10 design of antenna and thus saving mass and space on the spacecraft. Also, by using a sufficiently long boom for antenna reflector deployment from the side of a spacecraft, the associated feed structure can be mounted directly onto the spacecraft top floor, alleviating the need for large heavy feed tower structures. Further, such a boom design has the advantage that it can be readily adapted  
15 for carrying various kinds of antenna reflector (i.e. reflectors of different shape and size), within the limits imposed by the structural envelope for stowing the boom with reflector.

For antenna reflector deployment from a spacecraft, it is to be understood that the boom could be exposed to extreme temperatures in space  
20 (typically, in the temperature range  $+140^{\circ}\text{C}$  to  $-180^{\circ}\text{C}$ ) on account of its substantial length (up to 7 metres long) when deployed a long way out from the spacecraft. More particularly, this could cause significant problems with the hinged joints of the boom between the hinge mechanisms and the various composite (carbon fibre) tube sections of the support arm. The inventors have  
25 now recognised that this problem can be addressed by bolting the hingedly-connected joints using metal bracket means with sufficient flexibility built into it to accommodate for significant changes in the material properties of the boom (for example, changes in size between the materials) in response to significant temperature variations (typically, between  $+140^{\circ}\text{C}$  to  $-180^{\circ}\text{C}$ ).

30            As previously described, the present invention extends to spacecraft with an articulated boom of the above described type, the boom fixed at one end to the spacecraft structure and the opposing end of the boom fixed to the antenna

- 5 -

reflector. In this way, the antenna reflector can be moved by movement of the supporting boom from a stowed position (for example, when mounted against a side of the spacecraft structure) to a required deployed position some distance out from the spacecraft. Optionally, the boom end fixed to the spacecraft structure is mounted directly to the feed structure. This has the advantage of removing platform distortions from the antenna geometry, giving improved overall performance.

Advantageously, for antenna reflector deployment from a spacecraft, the boom with reflector when in stowed position is foldably mounted to a sidewall of the spacecraft structure on a plurality of hold-down points (for example, pyrotechnic hold-downs), the hold-down points being capable of release prior to deployment of the boom/reflector. It is to be also appreciated that the hold-down points can be suitably formed to provide a degree of compliance in a number of different directions if desired, permitting the boom and the spacecraft structure not to impart unwanted thermal expansion loads on each other.

Further, the present invention extends to a satellite/spacecraft vehicle incorporating into one or more of its sides two or more articulated booms of the above described type. Optionally, the support arms of the two or more booms are positioned at the circumference of the associated reflectors when in stowed condition, such as to allow the reflectors to be stacked together within a space defined by the associated launch vehicle fairing. It is thus possible to deploy two or more reflectors, using one boom per reflector, from one or each side of the satellite/spacecraft vehicle. It is thus also possible in principle to deploy multiple reflectors, using one boom per reflector, from one or each side of the satellite/spacecraft vehicle, if desired.

Thus, in a further aspect, the present invention provides a method of stacking a plurality of deployable antenna reflectors in spacecraft, comprising: providing a first antenna reflector with boom of the above described type; moving said first antenna reflector to a first nesting position close to a sidewall of the spacecraft in such a manner that its supporting boom follows the circumference of the reflector along a first path; providing a second antenna reflector with boom of the above described type; and moving said second



- 6 -

antenna reflector to a second nesting position close to the sidewall of the spacecraft in such a manner that its supporting boom follows the circumference of the reflector along a second path and such that the first and second reflectors are disposed in juxtaposition in stacked relationship. Optionally, the spaced-apart arms of the booms, when in stacked condition, are disposed circumferentially around their associated reflectors in opposite senses (i.e. the arms of the booms are of generally opposite curvature). This particular mode of stacking has the advantage that there is no physical interference between the different component parts of the booms. Optionally, additional antenna reflectors with booms can be stacked in the spacecraft if desired, based upon the above described method of stacking.

The present invention also extends to a satellite/spacecraft vehicle incorporating into one or each of its sides a hingedly-mounted support structure including an antenna reflector with articulated boom of the above described type. In such an arrangement, the associated feed structure is preferably mounted to a separately-formed floor (for example, the top floor) of the satellite/spacecraft vehicle. This obviates the need for a complicated feed mounting (towers) structure in order to achieve long focal lengths. Also, this mounting arrangement permits the thermal control of the feed assembly to be achieved simply.

The present invention also extends to a satellite/spacecraft vehicle incorporating into one/each of its sides (a) a first hingedly-mounted support structure including an antenna reflector with supporting boom of the above described type, and (b) a second separate hingedly-mounted support structure for carrying two or more other antenna reflectors. The second support structure is preferably a frame of simple design in place of the above described boom structure. It is also envisaged that the two or more respective other antenna reflectors could be directly mounted onto the frame.

The present invention also extends to a reflector system for space-based applications incorporating an antenna reflector with supporting boom of the above described type.

- 7 -

Further, the present invention extends to an antenna structure incorporating the above described reflector system.

It is to be appreciated that the proposed deployable boom has a simplified, flexible and mechanically robust design and can be easily  
5 implemented for deployment of an antenna reflector in various space-based applications. The proposed boom design could equally be used for planetary reflecting applications, if desired.

The above and further features of the invention are set forth with particularity in the appended claims and will be described hereinafter with  
10 reference to the accompanying drawings.

#### **Brief Description of the Drawings**

Figure 1 is a schematic view of a proposed deployable support structure with dual reflectors for a spacecraft embodying the present invention, the Figure showing an antenna reflector with supporting boom in deployed condition and  
15 another antenna reflector with supporting boom in stowed condition; and

Figure 2 is a schematic view of another proposed deployable support structure for a spacecraft embodying the present invention.

#### **Detailed Description of Exemplary Embodiments**

Referring first to Figure 1, there is schematically shown therein a  
20 preferred deployable support structure 1 with dual reflectors for a spacecraft vehicle 2 embodying the present invention. The support structure 1 comprises a first arm carrier in the form of an articulated boom 5 having an antenna reflector 6 in deployed condition at its lower end 7 and a mount 8 for connecting the boom 5 to a section of a sidewall of the spacecraft 2 at its upper end. The  
25 arm carrier of the boom 5 has a shoulder joint 10, an elbow joint 11 and a wrist joint 12. Significantly, the elbow joint 11 has a dog-leg to facilitate stowage of the reflector 6 against the spacecraft's sidewall. The joints 10, 11, 12 are hingedly-connected at a plurality of points along the axial length of the arm carrier by means of a spring-operated mechanical hinge mechanism or other  
30 arrangement (not shown) such as to permit pivotal movement of the arm carrier

- 8 -

together with its associated reflector in directions perpendicular to its axis. It will be understood that the antenna reflector 6 is of a standard configuration (around 3.5m diameter) with long focal length capability.

As shown in Figure 1, the support structure 1 further comprises a second  
5 arm carrier in the form of another articulated boom 15 having an antenna reflector 16 in stowed condition at its upper end and a mount 18 for connecting the boom 15 to a different section of the same sidewall of the spacecraft 2 at its lower end. The reflector 16 is also of standard configuration (around 3.5m diameter).

10 As shown, the stowed boom 15 with antenna reflector 16 compactly nests within a circular area of the spacecraft sidewall, such that, if desired, the other boom 5 with reflector 6 (shown to be deployed) can be subsequently stacked on top whilst nesting close to the spacecraft sidewall in stowed condition (not shown). In such a stacked configuration (not shown), the arms  
15 of the booms 5, 15 are wrapped part-circumferentially around the associated stowed reflectors in opposite senses so that there is no physical interference between the different component parts of the booms 5, 15.

As also shown, the stowed boom 15 with antenna reflector 16 is mounted against the spacecraft sidewall on a plurality of pyrotechnic hold-down points.  
20 Each hold-down point is configured to allow compliance in certain directions to ensure that the boom and spacecraft structure do not impart unwanted thermal expansion loads on each other. It will be understood that the hold-down points are operably released prior to deployment of the boom/reflector.

In the described embodiment of Figure 1, the booms 5, 15 are about 7m  
25 long. By using booms of this length the feed structure 20 is mounted (as shown) directly onto the spacecraft top floor 21, alleviating the need for large heavy feed tower structures. The booms 5, 15 are formed of lightweight carbon fibre composite material. Because the boom structures are long, it will be understood that these structures extend some distance out into space from the  
30 spacecraft when deployed, and will become exposed to extreme temperatures, typically in the temperature range +140°C to - 180°C, during deployment. The

- 9 -

inventors have recognised that this can cause problems with the boom joints between the hinge mechanisms and the carbon fibre composite (tube) sections. To address these problems, the boom joints are bolted using a metal bracket with flexibility built into it so as to allow for change(s) in size between the materials.

In operation of the thus described arrangement of Figure 1 it will be understood that the two reflectors 6, 16 can be deployed individually or sequentially from the same side of the spacecraft (using one boom per reflector). It will also be understood that antenna pointing can be provided to achieve this deployment by use of 2 axes APM (antenna pointing mechanism) or by use of articulated stepper motor harmonic drive units (not shown). In this embodiment, the APM 2 axes functions are mounted in the boom close to the reflector edge. This has the advantage of reducing/minimising the mass mounted on the reflectors whilst still providing a 2-axes geometry and allowing APM mass to be easily tied down for launch.

A second embodiment of the present invention will now be described. The second embodiment is similar to the first embodiment and so corresponding parts have been assigned corresponding reference numerals with primes.

Referring to Figure 2, there is schematically shown therein another proposed deployable support structure 1' for a spacecraft 2' embodying the present invention. In common with the embodiment of Figure 1, this second embodiment has an articulated boom 5' with antenna reflector 6' in deployed condition at its lower end and a mount 8' for connecting the boom to a section of a sidewall of the spacecraft 2' at its upper end. It is to be understood that the arm carrier of the boom 5' has the same hingedly-connected joints structure as described previously in relation to the booms of the first embodiment of Figure 1. Thus, the specific boom structure 5' will not be described again in order to avoid unnecessary repetition.

The arrangement of Figure 2 differs from that of Figure 1 only in that, rather than having a second articulated boom (as shown in Figure 1), there is

- 10 -

provided instead a hingedly-mounted frame 39 for carrying two more antenna reflectors 40, 41. The reflectors 40, 41 as shown, are of identical size and shape and are directly mounted onto the frame at two separate mounts. It is to be understood that the reflectors are of a standard configuration with long focal  
5 length capability. In a further alternative embodiment (not shown) similar to that of Figure 2, the reflectors mounted on the frame could instead be of different size and shape and be mounted onto the frame via APM mechanisms.

In the above described embodiments, it is to be appreciated that the described articulated boom structure bears definite advantage in the following  
10 various respects:

- Large diameter reflectors with long focal lengths,  $f/d > 2$ , give acceptable cross-polar performance without the need for Gregorian designs (sub reflectors).
- Simpler design taking up less accommodation space, therefore  
15 allowing more antennas & larger total spacecraft aperture, to be mounted on each Spacecraft.
- Allows standard mounting of reflector/boom & mounting feeds on CM floor obviates the need for complicated feed mounting structure or towers, to achieve long focal lengths.
- Provides more options to reduce scatter as position of feeds and  
20 reflector is more flexible with respect to spacecraft structures.
- Thermal control of feed assembly and feed chains may be easier to achieve by mounting directly onto CM floor (internal heat pipes).

Having thus described the present invention by reference to two  
25 preferred embodiments, it is to be appreciated that the embodiments are in all respects exemplary and that modifications and variations are possible without departure from the spirit and scope of the invention. Essentially, any boom arrangement could be used which relies upon the proposition of supporting the antenna reflector with an extendable articulated boom of sufficient length so that  
30 the reflector is controllably moved by extension of the boom from stowed



- 11 -

position to deployed position. For example, whilst in the first embodiment two such boom structures are used, the arrangement could alternatively be modified to provide additional boom structures from the same side or from different sides of the spacecraft, thereby enabling the effective deployment of multiple antenna  
5 reflectors from one or more sides of the spacecraft.

Furthermore, the number of hinged joints in the boom design and the length of boom to be deployed could also be appropriately varied, for example, so as to ensure that antenna reflectors of different shape/size can be effectively deployed.

10 It is also to be appreciated that the proposed boom design finds utility in various planetary reflecting applications as well as in various space-based applications.

It is also to be understood that any feature described in relation to any one embodiment may be used alone, or in combination with other features  
15 described, and may also be used in combination with one or more features of any other of the embodiments, or any combination of any other of the embodiments.

**Claims**

1. An articulated boom comprising:

5 a support arm defining a number of hingedly-connected joints, the arm being adapted and arranged to carry an antenna reflector so that in use, the reflector can move between a first stowed position in which the reflector is in folded condition and a second deployed position in which the reflector is in deployed condition.

2. An articulated boom for connection to a spacecraft vehicle comprising:

10 a support arm defining a number of hingedly-connected joints, the arm being adapted and arranged to carry an antenna reflector so that in use, the reflector can move between a first stowed position in which the reflector is nested within a predetermined volume of the spacecraft vehicle and a second deployed position in which the reflector is deployed  
15 in space.

3. An articulated boom as claimed in claim 1 or claim 2 wherein the support arm includes a dog-leg for permitting stowage of the reflector in said first stowed position, the dog-leg being adapted and arranged to permit the support arm of the boom to be positioned at the circumference of the  
20 reflector when in stowed condition.

4. An articulated boom as claimed in claim 1 or claim 2 or claim 3 wherein there are four single-axis hingedly-connected joints.

5. An articulated boom as claimed in any preceding claim wherein one or more of said hingedly-connected joints comprises an articulated stepper  
25 motor harmonic drive unit.

6. An articulated boom as claimed in any preceding claim wherein one or more of said hingedly-connected joints comprises a spring-operated mechanical hinge.

7. An articulated boom as claim in any preceding claim further comprising  
30 antenna pointing means.

- 13 -

8. An articulated boom as claimed in claim 7 wherein the antenna pointing means relies upon application of a 2-axis antenna pointing mechanism.
9. An articulated boom as claimed in claim 8 wherein the 2-axis antenna pointing mechanism functions are separately mounted on the support arm and the reflector.
10. An articulated boom as claimed in any preceding claim wherein the support arm is configured to be sufficiently long so as to carry an antenna reflector of around 3.5 metres diameter with an associated focal length of around 7 metres.
- 10 11. An articulated boom as claimed in any preceding claim wherein the hingedly-connected joints are bolted using metal bracket means with a degree of flexibility to accommodate for changes in the material properties of the boom in response to temperature variations between +140°C and -180°C.
- 15 12. An articulated boom as claimed in any of claims 2 to 11 wherein one end of the support arm is mounted to the associated feed structure of the spacecraft vehicle and the opposing end of the support arm is mounted to the antenna reflector.
- 20 13. An articulated boom as claimed in claim 12 wherein the reflector when in stowed position is foldably mounted to a sidewall of the spacecraft vehicle on a plurality of hold-down points, which hold-down points are operably released prior to deployment of the reflector.
- 25 14. An articulated boom as claimed in claim 13 wherein said hold-down points are formed such as to provide a degree of compliance in a number of predetermined directions, permitting the boom and the spacecraft structure not to impart unwanted thermal expansion loads on each other.
- 30 15. A satellite or spacecraft vehicle incorporating into one/each of its sides two or more booms of the type claimed in any of claims 1 to 14, enabling two or more reflectors to be deployed from one/each side of the satellite/spacecraft vehicle.

- 14 -

16. A satellite or spacecraft vehicle as claimed in claim 15 wherein the support arms of the two or more booms are positioned at the circumference of the associated reflectors when in stowed condition, such as to allow the reflectors to be stacked together within a space defined by the associated launch vehicle fairing.
17. A satellite or spacecraft vehicle incorporating into one/each of its sides a hingedly-mounted support structure including an antenna reflector with boom of the type claimed in any of claims 1 to 14.
18. A satellite or spacecraft vehicle as claimed in claim 17 wherein the associated feed structure is mounted to a separately-formed floor of the satellite/spacecraft vehicle.
19. A satellite or spacecraft vehicle incorporating into one/each of its sides
- (a) a first hingedly-mounted support structure including an antenna reflector with boom of the type claimed in any of claims 1 to 14; and
  - (b) a second different hingedly-mounted support structure for carrying a plurality of antenna reflectors.
20. A reflector system for space-based applications incorporating an antenna reflector with supporting boom as claimed in any of claims 1 to 14.
21. An antenna structure incorporating a reflector system as claimed in claim 20.
22. An articulated boom or a number of articulated booms substantially as herein described with reference to the accompanying drawings.
23. A satellite or spacecraft vehicle with articulated boom(s) substantially as herein described with reference to the accompanying drawings.
24. A method of stacking a plurality of deployable antenna reflectors in spacecraft, comprising:
- providing a first antenna reflector with boom of the type claimed in any of claims 1 to 14;

- 15 -

moving said first antenna reflector to a first nesting position close to a sidewall of the spacecraft in such a manner that its supporting boom follows the circumference of the reflector along a first path;

providing a second antenna reflector with boom of the type claimed in  
5 any of claims 1 to 14; and

moving said second antenna reflector to a second nesting position close to the sidewall of the spacecraft in such a manner that its supporting boom follows the circumference of the reflector along a second path and such that the first and second reflectors are disposed in juxtaposition in  
10 stacked relationship.

25. A method of stacking a plurality of deployable antenna reflectors in spacecraft with articulated booms substantially as herein described with reference to the accompanying drawings.




**ABSTRACT OF THE DISCLOSURE**  
**IMPROVEMENTS RELATING TO DEPLOYABLE BOOMS**

5        This invention concerns improvements relating to deployable booms. An articulated boom is provided comprising a support arm with bend defining a number of hingedly-connected joints, the arm being adapted and arranged to carry an antenna reflector so that in use, the reflector can move between a first stowed position in which the reflector is in folded condition and a second deployed position in which the reflector is in deployed condition.

10        This invention extends to spacecraft (2) incorporating into one or more of its sides a plurality of such articulated booms (5, 15). The support arms of the booms can be advantageously positioned at the circumference of the associated reflectors (6, 16) when in stowed condition, such as to allow the reflectors to be neatly stacked together within a space defined by the launch  
15        vehicle fairing (not shown).


      It is to be appreciated that the proposed structure finds utility in the support deployment of multiple antenna reflectors in various space missions if desired, and bears structural advantage in terms of weight saving, simplicity of design (by taking up less accommodation space) and efficient accommodation  
20        of its apertures/reflectors.

(Figure 1)

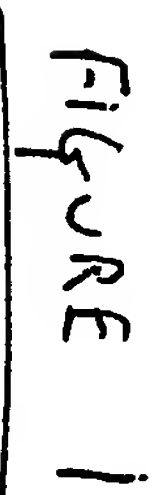

2 / 2

FIGURE 2

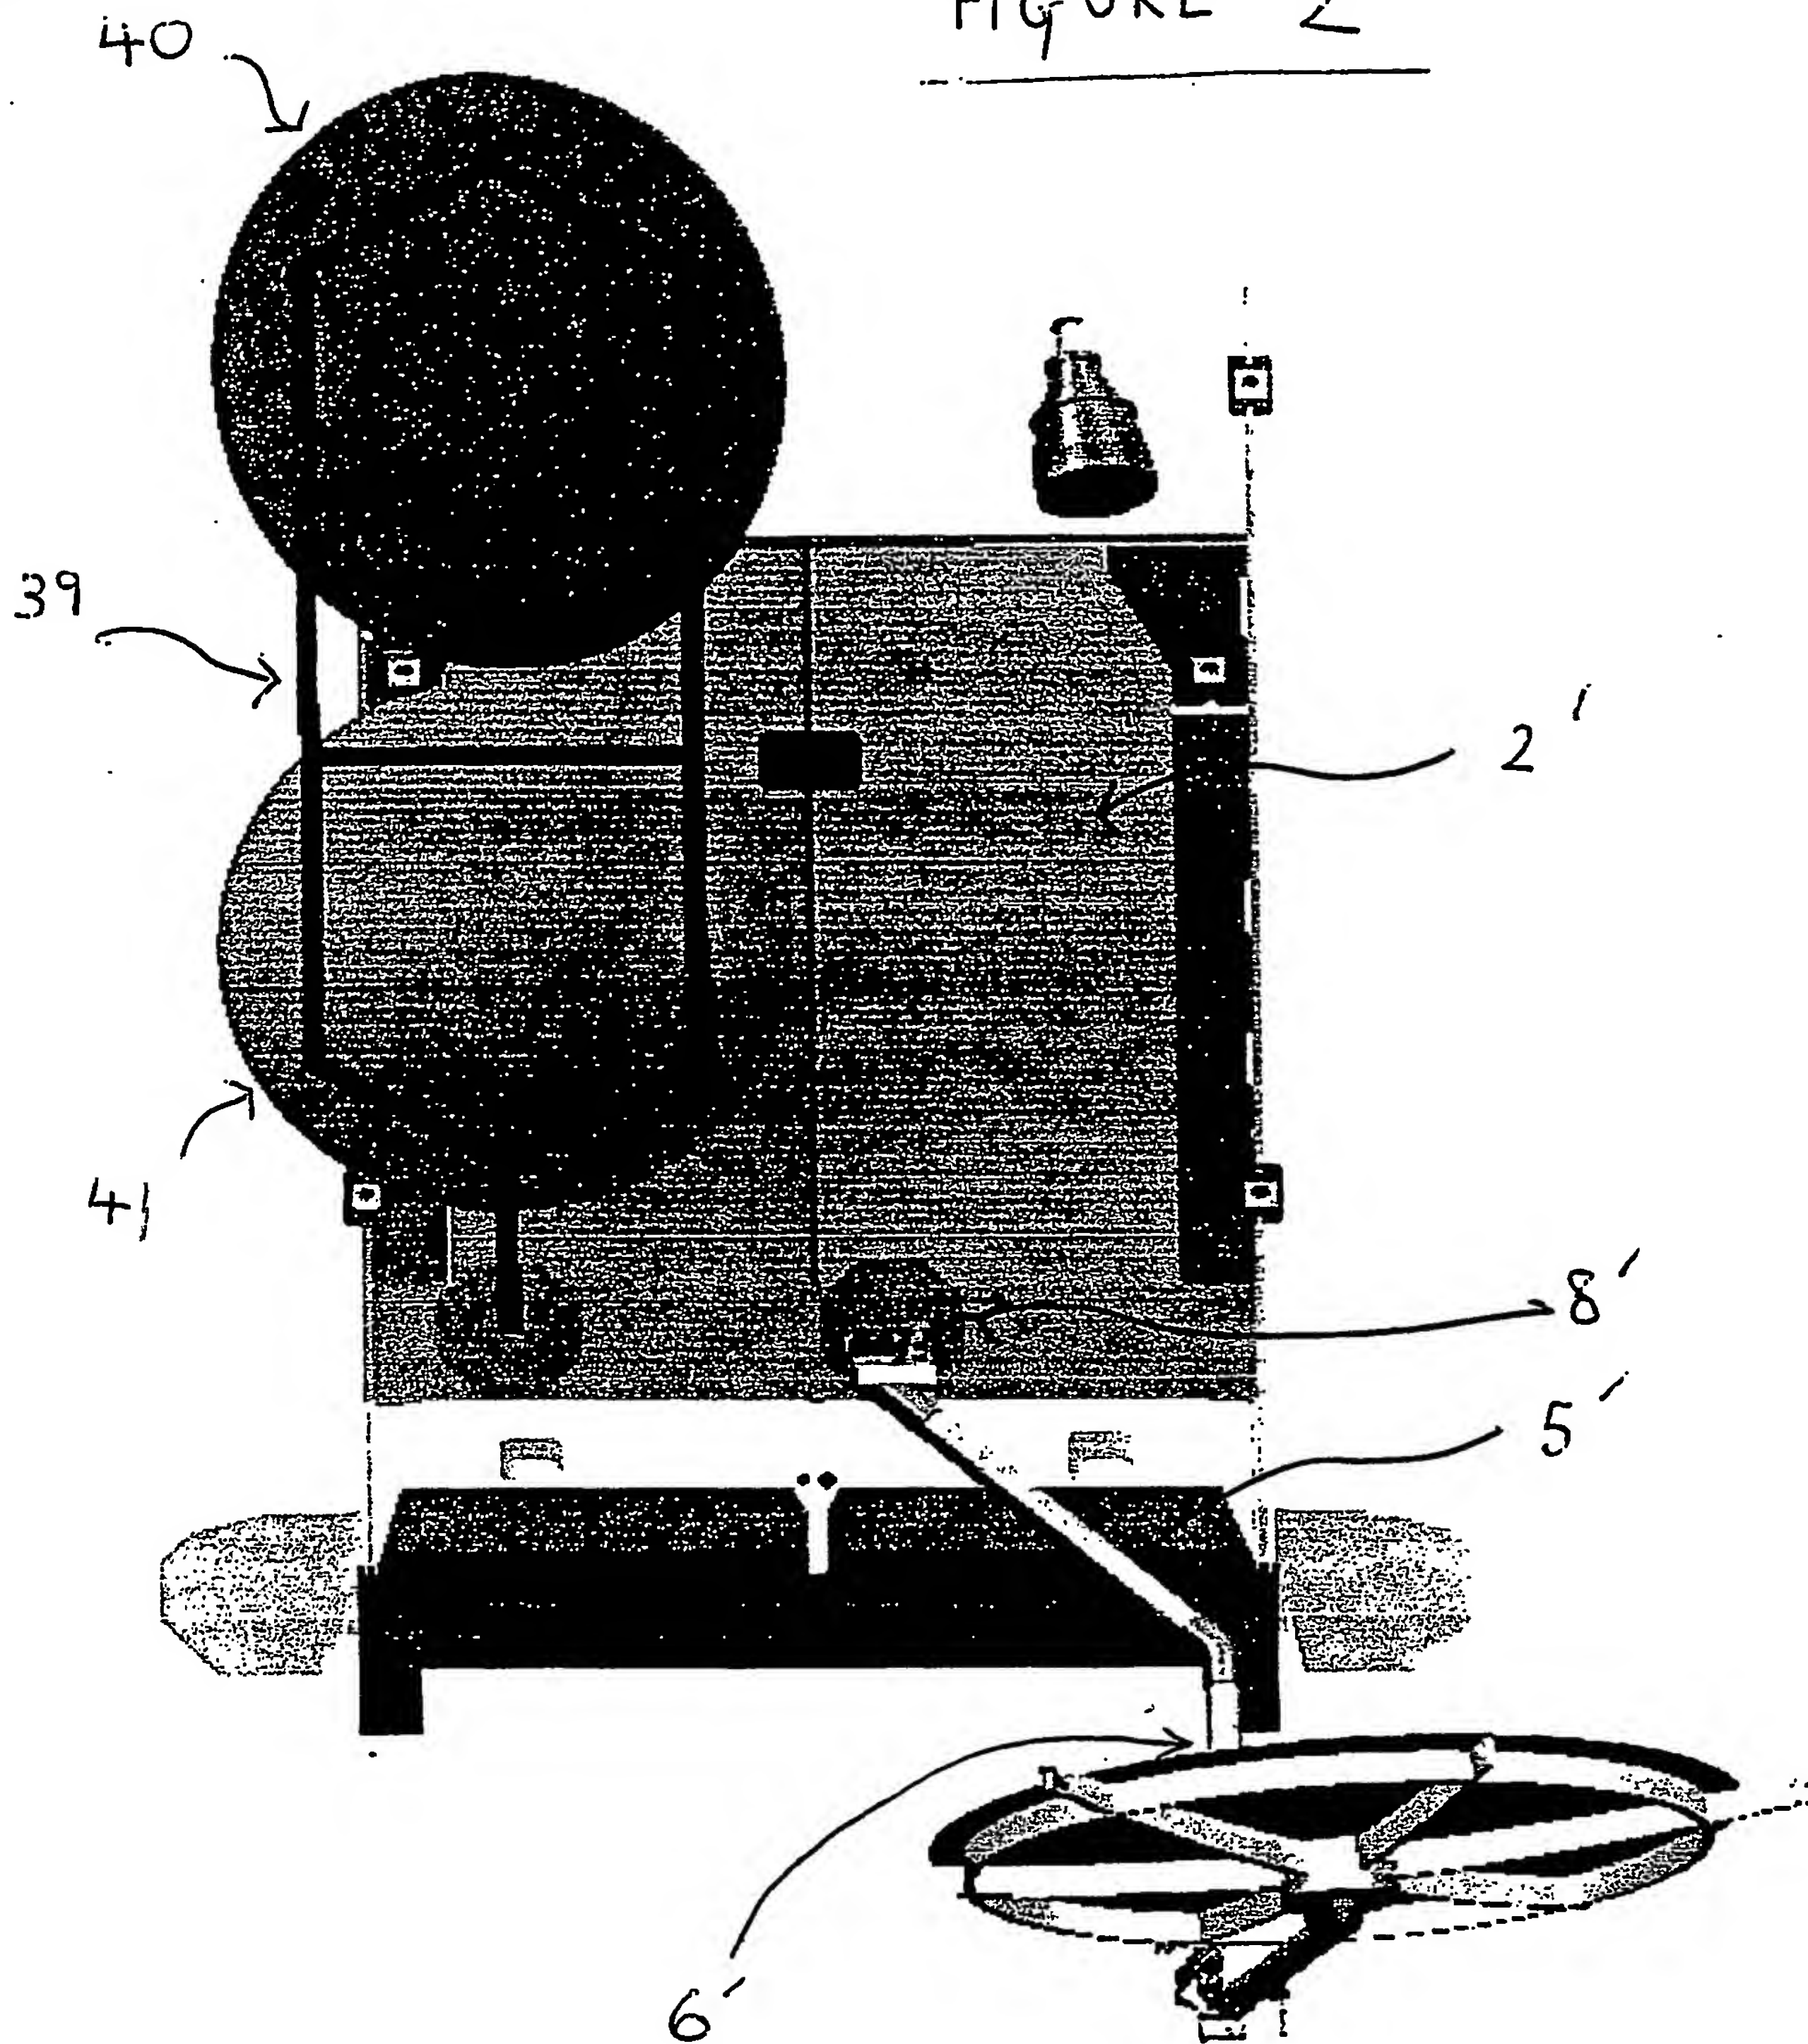

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/050045

International filing date: 01 April 2005 (01.04.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0408005.7  
Filing date: 08 April 2004 (08.04.2004)

Date of receipt at the International Bureau: 26 April 2005 (26.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**